



GREEN TELECOM

www.greentelftth.com

FTTx Fiber Management Solution



Green Telecom Tech.Co.,Ltd.
No.192,Beixing Road,Mazhu Town
Yuyao City,315450 P.R.China

Tel: +86-574-6242 8462
Fax: +86-574-6248 1666
Email: info@greentel-tech.com

FDB | FTB | ODP | FAT | CTO | Closure | Fiber Rosette

About Us

Registered in 1999, Green Telecom is professionally engaged in the integration and service of customized projects of deployment and FTTH optical distribution network. Green Telecom offers the most comprehensive selection of fiber-optical products to customers in different industries.

Green Telecom owns a factory of 40,000 square meters, with employees over 130 people, to manufacture 1) Telecom Racks and Cabinets 2) Plastic Fiber Termination Boxes, Splice Closures, Fiber Rosettes 3) Fiber Passive Products 4) Fiber Instruments and etc.

Integrity and quality are two factors we hold in the highest regard, Green Telecom always keeps 'quality, service' as the guiding principle. As a highly flexible and competitive market player, we are always ready to provide our customers a most suitable and customized solution.



Facilities



Factory Buildings



Passive Products Workroom



Plastic Injection and Metal Punching Workroom



Fiber Instruments Workroom

FTTx Fiber Management

FATD-0208B

Fiber Access Terminal Closure



Material	PP+Glass Fiber
Size(L*W*H)	182x182x183mm
Max Capacity	8 Cores
Inlets/Outlets	2/8

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	2x(8-17)mm,8x(3-7)mm
PLC Splitter	Steel Tube 1x8

FATD-0408B

Fiber Access Terminal Closure



Material	PP+Glass Fiber
Size(L*W*H)	248x276x125mm
Max Capacity	8 Cores
Inlets/Outlets	4/8

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	4x(8-17)mm,8x(3-7)mm
PLC Splitter	Steel Tube 1x8

FATD-0416B

Fiber Access Terminal Closure



Material	PP+Glass Fiber
Size(L*W*H)	359x277x120mm
Max Capacity	16 Cores
Inlets/Outlets	4/16

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	4x(8-17)mm,16x(3-7)mm
PLC Splitter	Steel Tube 1x8/1x16

FTTx Fiber Management

FATD-0010R

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Reinforced Huawei Mini SC
Size(L*W*H)	210x204x88mm	Protection Level	IP67
Max Capacity	8 Cores	Access Cable Diameter	10x(3-5)mm
Inlets/Outlets	2/8	PLC Splitter	Steel Tube 1x2 + 1x8

FAT-16R


Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	227x205x117mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	2x(8-17)mm, 16x(3-7)mm
Inlets/Outlets	2/16	PLC Splitter	Steel Tube 1x8/1X16

CTO-32

Fiber Multi-operator Indoor Box



Material	PC+ABS	Input Cable Method	Cutting
Size(L*W*H)	320x150x105mm	Protection Level	IP30
Max Capacity	32 Cores	Access Cable Diameter	1x16mm, 2x7mm, 16x3mm
Inlets/Outlets	3/32	PLC Splitter	Steel Tube 1x8/1x16

FTTx Fiber Management

CTO-48

Fiber Multi-operator Indoor Box



Material	PC+ABS	Input Cable Method	Cutting/uncutting
Size(L*W*H)	450x150x180mm	Protection Level	IP30
Max Capacity	48 Cores	Access Cable Diameter	8-16mm
Inlets/Outlets	1 x mid-span, 2 x round port	PLC Splitter	3pcs of Mini ABS box 1x16

FOB-128

Fiber Optic Splice Box-128 Cores



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	380x150x98mm	Protection Level	IP65
Max Capacity	128 Cores	Access Cable Diameter	14.3/16mm or 19mm
Inlets/Outlets	2/2	Splice Trays	8pcs x 16FO

FOB-256

Fiber Optic Splice Box-256 Cores



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	316x250x126mm	Protection Level	IP65
Max Capacity	256 Cores	Access Cable Diameter	4x(7-22)mm
Inlets/Outlets	2/2	Splice Trays	8pcs x 32FO

FTTx Fiber Management

FAT-8H

Fiber Access Terminal Indoor Box



Material	PC+ABS	Input Cable Method	Cutting/uncutting
Size(L*W*H)	236x126x50mm	Protection Level	IP54
Max Capacity	8 Cores	Access Cable Diameter	2x(6-12mm),8x(3-5mm)
Inlets/Outlets	2/8	PLC Splitter	Steel Tube 1x8

FAT-16K


Fiber Access Terminal Indoor Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	212x133x53mm	Protection Level	IP54
Max Capacity	16 Cores	Access Cable Diameter	2x(6-12)mm,16x(3-5)mm
Inlets/Outlets	2/16	PLC Splitter	Steel Tube 1x8/1X16

FAT-8T

Fiber Access Terminal Indoor Box

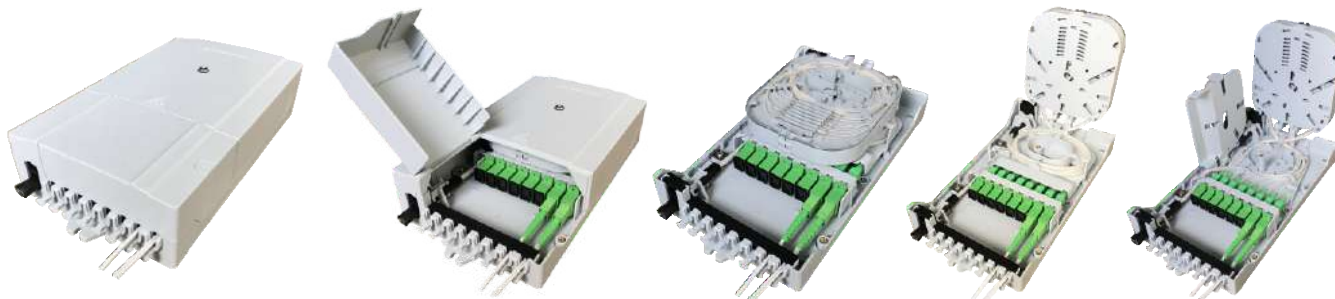

Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	135x193x47mm	Protection Level	IP54
Max Capacity	8 Cores	Access Cable Diameter	4x(6-12mm),8x(3-5mm)
Inlets/Outlets	4/8	PLC Splitter	Steel Tube 1x8

FTTx Fiber Management

FATC-001

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	385x245x130mm	Protection Level	IP68
Max Capacity	16 Cores	Access Cable Diameter	4x(8-17)mm,16x(3-7)mm
Inlets/Outlets	4/16	Splice Tray	4pcs x 24FO

FATC-002

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	385x245x155mm	Protection Level	IP68
Max Capacity	24 Cores	Access Cable Diameter	2x(8-17)mm,24x(3-7)mm
Inlets/Outlets	2/24	Splice Tray	4pcs x 24FO

FATC-003

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	385x245x155mm	Protection Level	IP68
Max Capacity	24 Cores	Access Cable Diameter	4x(8-17)mm,24x(3-7)mm
Inlets/Outlets	4/24	Splice Tray	4pcs x 24FO

FTTx Fiber Management

FATC-004

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	395x245x130mm	Protection Level	IP68
Max Capacity	288 Cores	Access Cable Diameter	8x(8-17)mm
Inlets/Outlets	4/4	Splice Tray	12pcs x 24FO

FATC-005

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	385x245x130mm	Protection Level	IP67
Max Capacity	8 Cores	Access Cable Diameter	4x(8-17)mm,8xMini SC
Inlets/Outlets	4/8	Splice Tray	4pcs x 24FO

FATC-006

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	385x245x155mm	Protection Level	IP67
Max Capacity	16 Cores	Access Cable Diameter	4x(8-17)mm,16xMini SC
Inlets/Outlets	4/16	Splice Tray	4pcs x 24FO

FTTx Fiber Management

FATC-007

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	385x245x155mm	Protection Level	IP68
Max Capacity	24 Cores	Access Cable Diameter	4x(8-17)mm,24x(3-7)mm
Inlets/Outlets	4/24	Splice Tray	12pcs x 24FO

FATC-008

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	385x245x130mm	Protection Level	IP68
Max Capacity	16 Cores	Access Cable Diameter	4x(8-17)mm,16x(3-7)mm
Inlets/Outlets	4/16	PLC Splitter	LGX 1x8/1x16

AFAT-002R

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	285x175x120mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4/6x(7-13)mm,16xMini SC
Inlets/Outlets	4/16 or 6/16	PLC Splitter	Steel Tube 1x8/1x16

FTTx Fiber Management

AFAT-002A

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	285x175x110mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4/6x(7-13)mm,16x(3-5)mm
Inlets/Outlets	4/16 or 6/16	PLC Splitter	Steel Tube 1x8/1x16

AFAT-002L

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	285x175x110mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4/6x(7-13)mm,16x(3-5)mm
Inlets/Outlets	4/16 or 6/16	PLC Splitter	LGX 1x8/1x16

AFAT-002S

Fiber Access Terminal Closure



Material	PP+Glass Fiber	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	285x175x90mm	Protection Level	IP65
Max Capacity	96 Cores	Access Cable Diameter	4/6x(7-13)mm
Inlets/Outlets	2/2 or 3/3	Splice Tray	4pcs x 24FO

FTTx Fiber Management

FATM-0416A

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	290x210x78mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4x(7-13)mm,16x(3-5)mm
Inlets/Outlets	4/16	Splice Tray	4pcs x 24FO

FATM-0416L

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	290x210x78mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4x(7-13)mm,16x(3-5)mm
Inlets/Outlets	4/16	PLC Splitter	LGX 1x8/1x16

FATM-0416S

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	290x210x78mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4x(7-13)mm,16x(3-5)mm
Inlets/Outlets	4/16	PLC Splitter	Steel Tube 1x8/1x16

FTTx Fiber Management

FATM-0416AT

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	290x210x78mm
Max Capacity	16 Cores
Inlets/Outlets	4/16

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	4x(7-13)mm, 16x(3-5)mm
Splice Tray	4pcs x 24FO

FATM-0416LT

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	290x210x78mm
Max Capacity	16 Cores
Inlets/Outlets	4/16

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	4x(7-13)mm, 16x(3-5)mm
PLC Splitter	LGX 1x8/1x16

FATM-0416ST

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	290x210x78mm
Max Capacity	16 Cores
Inlets/Outlets	4/16

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	4x(7-13)mm, 16x(3-5)mm
PLC Splitter	Steel Tube 1x8/1x16

FTTx Fiber Management

FATM-0408B

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	290x210x78mm
Max Capacity	8 Cores
Inlets/Outlets	4/8

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	4x(7-13)mm,8x(3-5)mm
Splice Tray	4pcs x 12FO

FATM-0408R

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	290x210x78mm
Max Capacity	8 Cores
Inlets/Outlets	4/8

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	4x(7-13)mm,8xMini SC
Splice Tray	4pcs x 12FO

FATM-0316R

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	290x210x108mm
Max Capacity	16 Cores
Inlets/Outlets	3/16

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	3x(7-13)mm,16xMini SC
Splice Tray	4pcs x 12FO

FTTx Fiber Management

FATM-0316B

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	290x210x108mm
Max Capacity	16 Cores
Inlets/Outlets	3/16

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	4x(7-13)mm, 16x(3-5)mm
Splice Tray	4pcs x 24FO

FATM-0424L

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	290x210x108mm
Max Capacity	24 Cores
Inlets/Outlets	4/24

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	4x(7-13)mm, 24x(3-5)mm
PLC Splitter	LGX 1x8/1x16

FATM-0416R

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	290x175x130mm
Max Capacity	16 Cores
Inlets/Outlets	4/16

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	4x(7-13)mm, 16xMini SC
Splice Tray	4pcs x 12FO

FTTx Fiber Management

FATJ-0109R


Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	290x210x78mm	Protection Level	IP65
Max Capacity	8 Cores	Access Cable Diameter	1x(7-13)mm,9xMini SC
Inlets/Outlets	2/8	PLC Splitter	Steel Tube 1x8

FATJ-0416L


Fiber Access Terminal Box

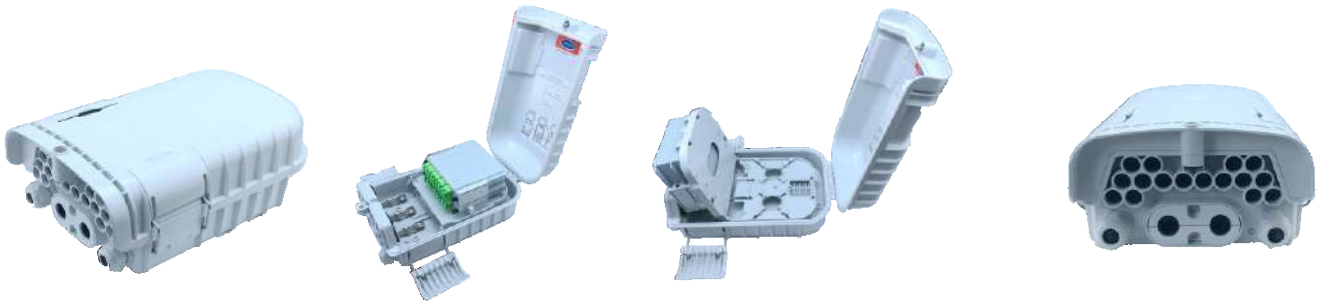

Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	290x210x78mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4x(7-13)mm,16x(3-5)mm
Inlets/Outlets	4/16	PLC Splitter	LGX 1x8/1x16

FATJ-0416L

Fiber Access Terminal Box

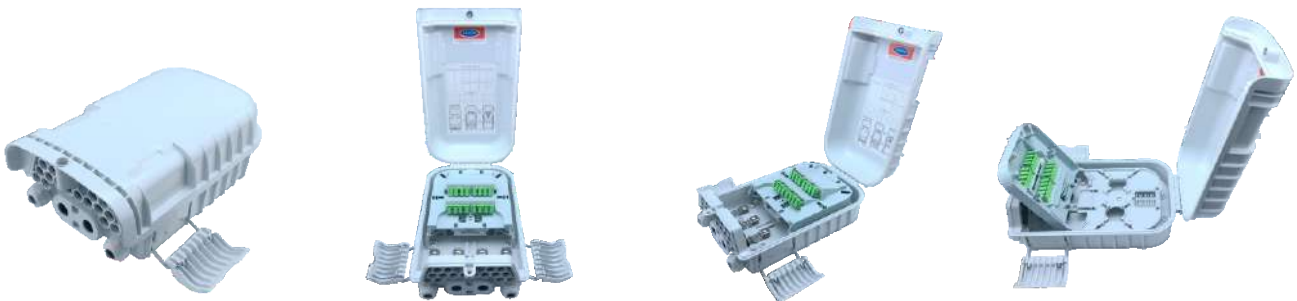

Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	290x210x78mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4x(7-13)mm,16x(3-5)mm
Inlets/Outlets	4/16	PLC Splitter	Steel Tube 1x8/1x16

FTTx Fiber Management

FATB-0416A

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	340x210x95mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4x(7-13)mm,16x(3-5)mm
Inlets/Outlets	4/16	Splice Tray	4pcs x 24FO

FATB-0416L

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	340x210x95mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4x(7-13)mm,16x(3-5)mm
Inlets/Outlets	4/16	PLC Splitter	LGX 1x8/1x16

FATB-0416S

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	340x210x95mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	4x(7-13)mm,16x(3-5)mm
Inlets/Outlets	4/16	PLC Splitter	Steel Tube 1x8/1x16

FTTx Fiber Management

FATB-0424A

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	340x210x95mm	Protection Level	IP65
Max Capacity	24 Cores	Access Cable Diameter	4x(7-13)mm,24x(3-5)mm
Inlets/Outlets	4/24	Splice Tray	4pcs x 24FO

FATB-0408R

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	340x210x95mm	Protection Level	IP65
Max Capacity	8 Cores	Access Cable Diameter	4x(7-13)mm,8xMini SC
Inlets/Outlets	4/8	Splice Tray	4pcs x 24FO

FATB-0216R

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	340x210x95mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	2x(7-13)mm,16xMini SC
Inlets/Outlets	2/16	Splice Tray	4pcs x 24FO

FTTx Fiber Management

FAT-2A

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	168x102x32mm	Protection Level	IP65
Max Capacity	2 Cores	Access Cable Diameter	1x(7-12)mm, 2x(3-5)mm
Inlets/Outlets	1/2	PLC Splitter	Steel tube 1x2

FAT-2B


Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting
Size(L*W*H)	215x145x50mm	Protection Level	IP65
Max Capacity	2 Cores	Access Cable Diameter	2x(7-13)mm
Inlets/Outlets	1/1	PLC Splitter	Steel tube 1x2

FAT-4A

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	186x116x41mm	Protection Level	IP65
Max Capacity	4 Cores	Access Cable Diameter	1x(7-12)mm, 4x(3-5)mm
Inlets/Outlets	1/4	PLC Splitter	Steel tube 1x4

FTTx Fiber Management

FAT-4B

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting
Size(L*W*H)	191x120x44mm	Protection Level	IP65
Max Capacity	4 Cores	Access Cable Diameter	1x(7-13)mm,4x(3-5)mm
Inlets/Outlets	1/4	PLC Splitter	Steel tube 1x4

FAT-4C

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	190x55x41mm	Protection Level	IP65
Max Capacity	4 Cores	Access Cable Diameter	1x(7-12)mm,4x(3-5)mm
Inlets/Outlets	1/4	PLC Splitter	Steel tube 1x4

FAT-6A

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	186x116x41mm	Protection Level	IP65
Max Capacity	6 Cores	Access Cable Diameter	1x(7-12)mm,6x(3-5)mm
Inlets/Outlets	1/6	PLC Splitter	Steel tube 1x4

FTTx Fiber Management

FAT-8A

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting
Size(L*W*H)	245x203x69mm	Protection Level	IP65
Max Capacity	8 Cores	Access Cable Diameter	2x(7-13)mm,8x(3-5)mm
Inlets/Outlets	2/8	PLC Splitter	Steel tube 1x8

FAT-8B

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting
Size(L*W*H)	199x160x46mm	Protection Level	IP65
Max Capacity	8 Cores	Access Cable Diameter	3x(7-13)mm
Inlets/Outlets	1/2	PLC Splitter	Steel tube 1x8

FAT-8C

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	235x200x62mm	Protection Level	IP65
Max Capacity	8 Cores	Access Cable Diameter	2x(7-14)mm,12x(3-5)mm
Inlets/Outlets	2/12	PLC Splitter	LGX 1x8

FTTx Fiber Management

FAT-8E

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting
Size(L*W*H)	213x163x47mm	Protection Level	IP65
Max Capacity	8 Cores	Access Cable Diameter	1x(7-13)mm,8x(3-5)mm
Inlets/Outlets	1/8	PLC Splitter	Steel tube 1x8

FAT-8G

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	250x190x72mm	Protection Level	IP65
Max Capacity	12 Cores	Access Cable Diameter	2x(7-13)mm,12x(3-5)mm
Inlets/Outlets	2/12	PLC Splitter	LGX 1x8

FAT-8J

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	192x133x47mm	Protection Level	IP54
Max Capacity	8 Cores	Access Cable Diameter	4x(6-12)mm,8x(3-5)mm
Inlets/Outlets	4/8	PLC Splitter	Steel tube 1x8

FTTx Fiber Management

FAT-8K

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	190x55x41mm	Protection Level	IP65
Max Capacity	8 Cores	Access Cable Diameter	1x(7-13)mm,8x(3-5)mm
Inlets/Outlets	1/8	PLC Splitter	Steel tube 1x8

FAT-12A

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	235x200x62mm	Protection Level	IP65
Max Capacity	12 Cores	Access Cable Diameter	2x(7-13)mm,12x(3-5)mm
Inlets/Outlets	2/12	PLC Splitter	Steel tube 1x8

FAT-12B

Fiber Access Terminal Box




Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	250x190x72mm	Protection Level	IP65
Max Capacity	12 Cores	Access Cable Diameter	2x(7-14)mm,12x(3-5)mm
Inlets/Outlets	2/12	PLC Splitter	Steel tube 1x8

FTTx Fiber Management

FAT-16A

Fiber Access Terminal Box

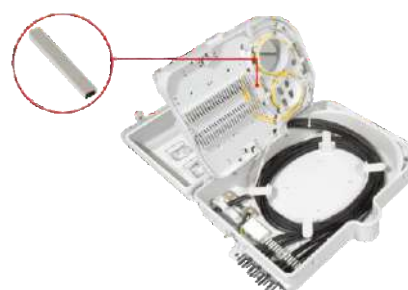

Material	PC+ABS
Size(L*W*H)	317x237x101mm
Max Capacity	24 Cores
Inlets/Outlets	3/24

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	3x(7-13)mm, 12x(3-5)mm
PLC Splitter	LGX 1x8/1x16

FAT-16B

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	292x218x83mm
Max Capacity	16 Cores
Inlets/Outlets	2/16

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	2x(7-13)mm, 16x(3-5)mm
PLC Splitter	Steel tube 1x8/1x16

FAT-16C

Fiber Access Terminal Box



Material	PC+ABS
Size(L*W*H)	301x224x73mm
Max Capacity	16 Cores
Inlets/Outlets	2/16

Input Cable Method	Cutting/Uncutting
Protection Level	IP65
Access Cable Diameter	2x(7-14)mm, 16x(3-5)mm
PLC Splitter	Steel tube 1x8/1x16

FTTx Fiber Management

FAT-16D

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	301x224x73mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	2x(7-13)mm,16x(3-5)mm
Inlets/Outlets	2/16	PLC Splitter	Steel tube 1x8/1x16

FAT-16J

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	292x218x83mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	2x(7-13)mm,16x(3-5)mm
Inlets/Outlets	2/16	PLC Splitter	LGX 1x8/1x16

FAT-16L

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	327x258x88mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	3x(7-14)mm,16x(3-5)mm
Inlets/Outlets	3/16	PLC Splitter	Steel tube 1x8/1x16

FTTx Fiber Management

FAT-24A

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	317x237x101mm	Protection Level	IP65
Max Capacity	24 Cores	Access Cable Diameter	3x(7-13)mm,24x(3-5)mm
Inlets/Outlets	3/24	PLC Splitter	Steel tube 1x8/1x16

FAT-24B

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	340x250x110mm	Protection Level	IP65
Max Capacity	24 Cores	Access Cable Diameter	2x(7-13)mm,24x(3-5)mm
Inlets/Outlets	2/16	PLC Splitter	Steel tube 1x8/1x16

FAT-24H

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	330x305x105mm	Protection Level	IP65
Max Capacity	24 Cores	Access Cable Diameter	4x(7-14)mm,24x(3-5)mm
Inlets/Outlets	4/24	PLC Splitter	Steel tube 1x8/1x16

FTTx Fiber Management

FAT-24J

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	330x305x105mm	Protection Level	IP65
Max Capacity	24 Cores	Access Cable Diameter	4x(7-13)mm,24x(3-5)mm
Inlets/Outlets	4/24	PLC Splitter	LGX 1x8/1x16

FAT-48A

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting
Size(L*W*H)	420x320x132mm	Protection Level	IP65
Max Capacity	48 Cores	Access Cable Diameter	4x(7-16)mm,4x(8-12)mm
Inlets/Outlets	4/4	Splice Tray	2pcs x 24FO

FAT-48E

Fiber Access Terminal Box



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	330x305x105mm	Protection Level	IP65
Max Capacity	48 Cores	Access Cable Diameter	4x(7-14)mm,48x(3-5)mm
Inlets/Outlets	4/48	PLC Splitter	Steel tube 1x8/1x16

FTTx Fiber Management

FRB-1A

Fiber Rosette Indoor



Material	ABS	Mounting Method	Wall/Embedded
Size(L*W*H)	158x45x16mm	Protection Level	IP65
Max Capacity	1 Cores	Access Cable Diameter	2-5mm
Max Adapters	1 x SC	Weight	40g

FRB-1B

Fiber Rosette Indoor



Material	ABS	Mounting Method	Wall/Embedded
Size(L*W*H)	116x85x22mm	Protection Level	IP54
Max Capacity	1 Cores	Access Cable Diameter	2-5mm
Max Adapters	1 x SC	Weight	80g

FRB-1C

Fiber Rosette Indoor



Material	ABS	Mounting Method	Wall/Embedded
Size(L*W*H)	90x50x18mm	Protection Level	IP45
Max Capacity	1 Cores	Access Cable Diameter	2-5mm
Max Capacity	1 x SC	Weight	60g

FTTx Fiber Management

FRB-1D

Fiber Rosette Indoor



Material	ABS
Size(L*W*H)	148x90x16mm
Max Capacity	1 Cores
Max Adapters	1 x SC

Mounting Method	Wall/Embedded
Protection Level	IP45
Access Cable Diameter	2-5mm
Weight	80g

FRB-1J

Fiber Rosette Indoor



Material	ABS
Size(L*W*H)	116x70x18mm
Max Capacity	1 x Fiber + 1 x Copper
Max Adapters	1 x SC + 1 x RJ11

Mounting Method	Wall/Embedded
Protection Level	IP54
Access Cable Diameter	2-5mm
Weight	60g

FRB-2A

Fiber Rosette Indoor



Material	ABS
Size(L*W*H)	130x84x24mm
Max Capacity	2 Cores
Max Capacity	2 x SC

Mounting Method	Wall/Embedded
Protection Level	IP45
Access Cable Diameter	2-5mm
Weight	80g

FTTx Fiber Management

FRB-2B

Fiber Rosette Indoor



Material	ABS
Size(L*W*H)	105x82x22mm
Max Capacity	2 Cores
Max Adapters	2 x SC

Mounting Method	Wall/Embedded
Protection Level	IP45
Access Cable Diameter	2-5mm
Weight	88g

FRB-2C

Fiber Rosette Indoor




Material	ABS
Size(L*W*H)	86x86x27mm
Max Capacity	2xFiber / 1xFiber + 1xCopper
Max Adapters	2xSC / 1xSC + 1 x RJ11

Mounting Method	Wall/Embedded
Protection Level	IP54
Access Cable Diameter	2-5mm
Weight	60g

FRB-2F

Fiber Rosette Indoor




Material	ABS
Size(L*W*H)	116x70x15mm
Max Capacity	2 Cores
Max Capacity	2 x SC

Mounting Method	Wall/Embedded
Protection Level	IP45
Access Cable Diameter	2-5mm
Weight	60g

FTTx Fiber Management

FRB-4A

Fiber Rosette Indoor



Material	ABS
Size(L*W*H)	153x30x112mm
Max Capacity	4 Cores
Max Adapters	4 x SC

Mounting Method	Wall/Embedded
Protection Level	IP45
Access Cable Diameter	2-5mm
Weight	100g

FRB-4B

Fiber Rosette Indoor



Material	ABS
Size(L*W*H)	100x80x28mm
Max Capacity	4 Cores
Max Adapters	4 x SC

Mounting Method	Wall/Embedded
Protection Level	IP54
Access Cable Diameter	2-5mm
Weight	80g

FRB-4C

Fiber Rosette Indoor



Material	ABS
Size(L*W*H)	100x83x27mm
Max Capacity	4 Cores
Max Capacity	4 x SC

Mounting Method	Wall/Embedded
Protection Level	IP45
Access Cable Diameter	2-5mm
Weight	80g

FTTx Fiber Management

CPH-40A

Cable Portable Handhole



Material	Strengthen PP	Installation Method	Underground Buried
Size(L*W*H)	515x245x400mm	Fire Resistance	GR-902-CORE
Max Capacity	80m drop cable	Working Temperature	-40 to +65 Centigrade
Max Withstand Impact	50 joules	Weight	4.0kg

FOP-16A

Fiber Optic Pedestal



Material	ABS	Mounting Method	Soil Standing
Size(L*W*H)	700x310x310mm	Protection Level	IP55
Mounting Bracket	Stainless Steel	Max Box Diameter	300mm
Cable Port Diameter	3pcs x 50mm	Weight	4.5kg

FRB-4C

Fiber Rosette Indoor



Material	ABS	Mounting Method	Soil Standing
Size(L*W*H)	550x230x230mm	Protection Level	IP55
Mounting Bracket	Stainless Steel	Max Box Diameter	230mm
Cable Port Diameter	2pcs x 50mm	Weight	3.0kg

GJS-D001

DOME Fiber Optic Splice Closure



Material	Strengthen PP
----------	---------------

Size(H*D)	440x190
-----------	---------

Max Capacity	96 Cores
--------------	----------

Inlets/Outlets	1/3
----------------	-----

Sealing Method	Heat Shrinkable
----------------	-----------------

Protection Level	IP68
------------------	------

Access Cable Diameter	1x(9-18.5)mm,3x(6-13)mm
-----------------------	-------------------------

Splice Tray	4pcs x 24FO
-------------	-------------

GJS-D004

DOME Fiber Optic Splice Closure



Material	Strengthen PP
----------	---------------

Size(H*D)	540x205mm
-----------	-----------

Max Capacity	96 Cores
--------------	----------

Inlets/Outlets	1/4
----------------	-----

Sealing Method	Heat Shrinkable
----------------	-----------------

Protection Level	IP68
------------------	------

Access Cable Diameter	1x(10-25)mm,4x(8-18.5)mm
-----------------------	--------------------------

Splice Tray	4pcs x 24FO
-------------	-------------

GJS-D015

DOME Fiber Optic Splice Closure



Material	Strengthen PP
----------	---------------

Size(H*D)	299x146mm
-----------	-----------

Max Capacity	48 Cores
--------------	----------

Inlets/Outlets	1/3
----------------	-----

Sealing Method	Heat Shrinkable
----------------	-----------------

Protection Level	IP68
------------------	------

Access Cable Diameter	1x(9-18.5)mm,3x(6-13)mm
-----------------------	-------------------------

Splice Tray	4pcs x 12FO
-------------	-------------

FTTx Fiber Management

GJS-D021

DOME Fiber Optic Splice Closure



Material	Strengthen PP	Sealing Method	Heat Shrinkable
Size(H*D)	470x210	Protection Level	IP68
Max Capacity	144 Cores	Access Cable Diameter	1x(10-25)mm,8x(6-13)mm
Inlets/Outlets	1/8	Splice Tray	6pcs x 24FO

GJS-D022

DOME Fiber Optic Splice Closure



Material	Strengthen PP	Sealing Method	Heat Shrinkable
Size(H*D)	470x210mm	Protection Level	IP68
Max Capacity	144 Cores	Access Cable Diameter	1x(10-25)mm,4x(8-18.5)mm
Inlets/Outlets	1/4	Splice Tray	6pcs x 24FO

GJS-D023

DOME Fiber Optic Splice Closure



Material	Strengthen PP	Sealing Method	Heat Shrinkable
Size(H*D)	515x310mm	Protection Level	IP68
Max Capacity	288 Cores	Access Cable Diameter	1x(12-29)mm,6x(8-25)mm
Inlets/Outlets	1/6	Splice Tray	12pcs x 24FO

FTTx Fiber Management

GJS-D035

DOME Fiber Optic Splice Closure



Material

Strengthen PP

Size(H*D)

515x310

Max Capacity

720 Cores/408 Cores+48xSC

Inlets/Outlets

1/6

Sealing Method

Heat Shrinkable

Protection Level

IP68

Access Cable Diameter

1x(12-29)mm,6x(8-25)mm

Splice Tray

30x24FO/17x24FO+48xSC

GJS-D033

DOME Fiber Optic Splice Closure



Material

Strengthen PP

Size(H*D)

475x210mm

Max Capacity

144 Cores

Inlets/Outlets

2/4

Sealing Method

Mechanical

Protection Level

IP68

Access Cable Diameter

2x(5-17)mm,4x(8-16.5)mm

Splice Tray

6pcs x 24FO

GJS-D036

DOME Fiber Optic Splice Closure



Material

Strengthen PP

Size(H*D)

530x310mm

Max Capacity

720 Cores

Inlets/Outlets

2/6

Sealing Method

Mechanical

Protection Level

IP68

Access Cable Diameter

2x(5-17)mm,6x(8-16.5)mm

Splice Tray

60pcs x 12FO/30pcs x 24FO

FTTx Fiber Management

GJS-D037

DOME Fiber Optic Splice Closure



Material	Strengthen PP	Sealing Method	Mechanical
Size(H*D)	530x310	Protection Level	IP68
Max Capacity	288 Cores	Access Cable Diameter	2x(5-17)mm, 6x(8-16.5)mm
Inlets/Outlets	2/6	Splice Tray	12pcs x 24FO

GJS-H001

Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	390x210x120mm	Protection Level	IP68
Max Capacity	96 Cores	Access Cable Diameter	4x(8-20)mm, 2x(6-16.5)mm
Inlets/Outlets	3/3	Splice Tray	4pcs x 24FO

GJS-H002

Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	320x210x85mm	Protection Level	IP68
Max Capacity	96 Cores	Access Cable Diameter	2x(8-20)mm, 4x(8-16.5)mm
Inlets/Outlets	3/3	Splice Tray	4pcs x 24FO

FTTx Fiber Management

GJS-H004


Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	450x220x110	Protection Level	IP68
Max Capacity	96 Cores	Access Cable Diameter	4x(8-23)mm,2x(8-16.5)mm
Inlets/Outlets	3/3	Splice Tray	4pcs x 24FO

GJS-H005


Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	450x220x160mm	Protection Level	IP68
Max Capacity	288 Cores	Access Cable Diameter	4x(8-23)mm,2x(8-16.5)mm
Inlets/Outlets	3/3	Splice Tray	12pcs x 24FO

GJS-H007


Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	450x220x110mm	Protection Level	IP68
Max Capacity	96 Cores	Access Cable Diameter	4x(8-20)mm,4x(8-16.5)mm
Inlets/Outlets	4/4	Splice Tray	4pcs x 24FO

GJS-H008

Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	390x200x126	Protection Level	IP68
Max Capacity	96 Cores	Access Cable Diameter	4x(8-23)mm,2x(8-16.5)mm
Inlets/Outlets	3/3	Splice Tray	4pcs x 24FO

GJS-H009


Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	470x180x125mm	Protection Level	IP68
Max Capacity	96 Cores	Access Cable Diameter	4x(8-20)mm,2x(8-16.5)mm
Inlets/Outlets	3/3	Splice Tray	4pcs x 24FO

GJS-H010

Inline Fiber Optic Splice Closure

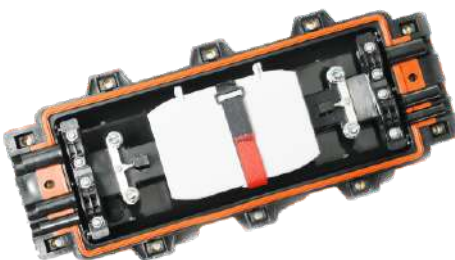

Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	396x200x126mm	Protection Level	IP68
Max Capacity	96 Cores	Access Cable Diameter	4x(8-20)mm,2x(8-16.5)mm
Inlets/Outlets	3/3	Splice Tray	4pcs x 24FO

FTTx Fiber Management

GJS-H011

Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	340x150x70	Protection Level	IP68
Max Capacity	48 Cores	Access Cable Diameter	4x(8-16.5)mm
Inlets/Outlets	2/2	Splice Tray	4pcs x 12FO

GJS-H013

Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	605x215x120mm	Protection Level	IP68
Max Capacity	144 Cores	Access Cable Diameter	4x(8-20)mm
Inlets/Outlets	2/2	Splice Tray	3pcs x 48FO

GJS-H015

Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	460x150x70mm	Protection Level	IP68
Max Capacity	96 Cores	Access Cable Diameter	4x(8-20)mm
Inlets/Outlets	2/2	Splice Tray	4pcs x 24FO

FTTx Fiber Management

GJS-H016

Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	605x215x175	Protection Level	IP68
Max Capacity	288 Cores	Access Cable Diameter	4x(8-20)mm
Inlets/Outlets	2/2	Splice Tray	6pcs x 48FO

GJS-H018


Inline Fiber Optic Splice Closure



Material	Strengthen PC	Sealing Method	Mechanical
Size(L*W*H)	413x160x88mm	Protection Level	IP68
Max Capacity	96 Cores	Access Cable Diameter	4x(8-16.5)mm, 2x(7-12)mm
Inlets/Outlets	3/3	Splice Tray	4pcs x 24FO

GJS-H020

Aerial Fiber Optic Splice Closure

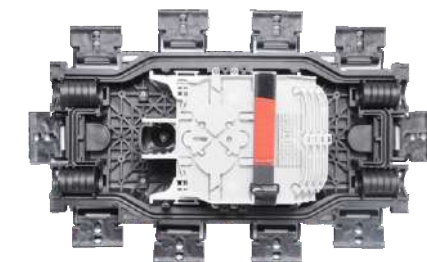


Material	Strengthen PP	Sealing Method	Mechanical
Size(L*W*H)	370x178x106mm	Protection Level	IP66
Max Capacity	96 Cores	Access Cable Diameter	4x(8-20)mm
Inlets/Outlets	2/2	Splice Tray	4pcs x 24FO

FTTx Fiber Management

AFAT-001

Aerial Fiber Optic Splice Closure

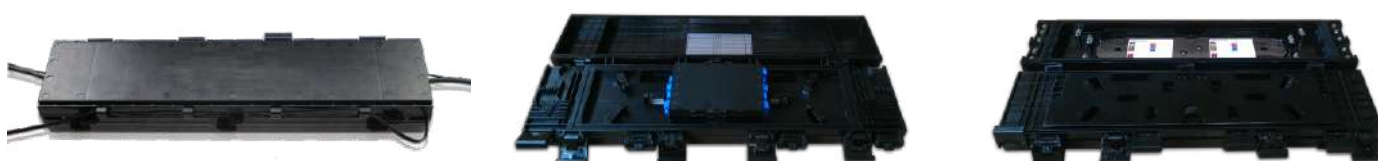

Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	605x106x88	Protection Level	IP66
Max Capacity	16 Cores	Access Cable Diameter	2x(8-20)mm, 16x(2-5)mm
Inlets/Outlets	2/16	PLC Splitter	2pcs x 1:8 Steel Tube

AFAT-004

Aerial Fiber Optic Splice Closure



Material	Strengthen PP	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	300x185x65mm	Protection Level	IP66
Max Capacity	8 Cores	Access Cable Diameter	4x(8-16.5)mm
Inlets/Outlets	2/8	PLC Splitter	LGX 1x8

AFAT-006

Aerial Fiber Optic Splice Closure



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	605x160x88mm	Protection Level	IP66
Max Capacity	16 Cores	Access Cable Diameter	3x(8-20)mm, 16x(2-5)mm
Inlets/Outlets	3/16	PLC Splitter	2pcs x 1:8 Solid Type

FTTx Fiber Management

FAT-16H

ODP(Optical Distribution Point) Solid



Material	PC+ABS	Input Cable Method	Cutting/Uncutting
Size(L*W*H)	344x293x89mm	Protection Level	IP65
Max Capacity	16 Cores	Access Cable Diameter	3x(8-20)mm, 16x(2-5)mm
Inlets/Outlets	3/16	PLC Splitter	2pcs x 1:8 Solid Type

DCR-2A

Drop Cable Retainer



Material	Strengthen PP+Nylon	Installation Method	Wall/Pole Mounted
Size(L*W*H)	44x46x39mm	Installation Size	23x35mm
Max Capacity	2 Cores	Access Cable Diameter	2x(2-3)mm
Tensile Force	500N	Weight	30g

DCR-4A

Drop Cable Retainer



Material	Strengthen PP+Nylon	Installation Method	Wall/Pole Mounted
Size(L*W*H)	58x46x39mm	Installation Size	23X49mm
Max Capacity	4 Cores	Access Cable Diameter	4x(2-3)mm
Tensile Force	500N	Weight	35g

Company Profile

Certificates



ISO 9001



TLC Management System



TLC Fiber Connector



TLC Fiber Splice Closure



TLC Fiber Distribution Cabinet



TLC Fiber Termination Box



TLC Fiber Distribution Hub



TLC Fiber PLC Splitter

Exhibitions



CIOE in China



ECOC in Europe



GITEK in UAE



CommunicAsia in Singapore



NETCOM in Brazil



Convergence India

[illegible]



Please visit our website:
www.greentelftth.com



Green Telecom Tech.Co.,Ltd.
No.192,Beixing Road,Mazhu Town
Yuyao City,315450 P.R.China

Tel: +86-574-6242 8462
Fax: +86-574-6248 1666
Email: info@greentel-tech.com